



## **2019 Electric Cargo Series Vans**

**Cutaway and Logistics Vans**





## 2019 Electric High Roof Logistics Van

<b>Dimensions</b>	Wheelbase (in/mm)	144.3 / 3,665
	Overall Length (in/mm)	234.6 / 5,960
	Overall Width Including Mirrors (in/mm)	79.53 / 2,020
	Overall Height (in/mm)	100.6 / 2,555
	Curb Weight (lb/kg)	6,305 / 2,860
	Gross Vehicle Weight Rating (lb/kg)	[11,133 / 5,050] or [14,110 / 6400]
	Total Payload (lb/kg)	[4,828 / 2,190] or [7,804 / 3,540]
	Cargo Volume (~ft³/m³)	399 / 11.3
<b>Mechanical</b>	Cargo Area Inside Dimension (mm)	3230*1775*1975
	Drive	RWD
	Single Motor	Synchronous Permanent Magnet
	Motor Cooling	Liquid Cooling
	Capacity / Battery Chemistry	90.8 or 106.2 kWh / NMC Li-ion
	On-Board Charger	6.6kW (Overnight Charging)
	Charger Type	J1772 CCS Level 2
<b>Performance</b>	Total Peak Power (hp/kW)	181 / 135
	Total Peak Torque (lb-ft/Nm)	575 / 780Nm
	Top Speed (mph/km/h) Max.	62 / 100
	Gradeability [%]	≥20%
	Turning Radius (ft/m)	23 / 7
	Typical Duty Cycle	Parcel Delivery Van Class 3/4
<b>Body &amp; Chassis</b>	Body Construction	Unibody
	Front Suspension	Independent / Disk Brakes
	Rear Suspension	Leaf Spring / Drum Brakes
	Hydraulic Brake System	ABS / EBD
	Michelin Agilis® CrossClimate®*	225 / 75R16LT

\*low-rolling resistance tires maximize vehicle range



**Zero Emissions, 100% Electric**  
**Zero Noise Pollution**



NOTE: All specifications are with normal manufacturing allowances and tolerances. Envirotech Drive Systems Incorporated. reserves the right to alter specifications at any time without prior notice.

Copyright © 2019 Envirotech Drive Systems Incorporated. All rights reserved. - [www.envirotechvehicles.com](http://www.envirotechvehicles.com)



## 2019 Electric Low Roof Logistics Van

### Dimensions

Wheelbase (in/mm)	144.3 / 3,665
Overall Length (in/mm)	234.6 / 5,960
Overall Width Including Mirrors (in/mm)	79.53 / 2,020
Overall Height (in/mm)	93.3 / 2,370
Curb Weight (lb/kg)	6,305 / 2,860
Gross Vehicle Weight Ratings (lb/kg)	[11,133 / 5,050] or [14,110 / 6400]
Total Payload (lb/kg)	[4,828 / 2,190] or [7,804 / 3,540]
Cargo Volume (~ft³/m³)	336 / 9.5
Cargo Area Inside Dimension (mm)	3230*1775*1658

### Mechanical

Drive	RWD
Single Motor	Synchronous Permanent Magnet
Motor Cooling	Liquid Cooling
Capacity / Battery Chemistry	90.8 or 106.2 kWh / NMC Li-ion
On-Board Charger	6.6kW (Overnight Charging)
Charger Type	J1772 CCS Level 2

### Performance

Total Peak Power (hp/kW)	181 / 135
Total Peak Torque (lb-ft/Nm)	575 / 780Nm
Top Speed (mph/km/h) Max.	62 / 100
Gradeability [%]	≥20%
Turning Radius (ft/m)	23 / 7
Typical Duty Cycle	Parcel Delivery Van Class 3/4

### Body & Chassis


Body Construction	Unibody
Front Suspension	Independent / Disk Brakes
Rear Suspension	Leaf Spring / Drum Brakes
Hydraulic Brake System	ABS / EBD
Michelin Agilis® CrossClimate®*	225 / 75R16LT

\*low-rolling resistance tires maximize vehicle range



**Zero Emissions, 100% Electric**

**Zero Noise Pollution**

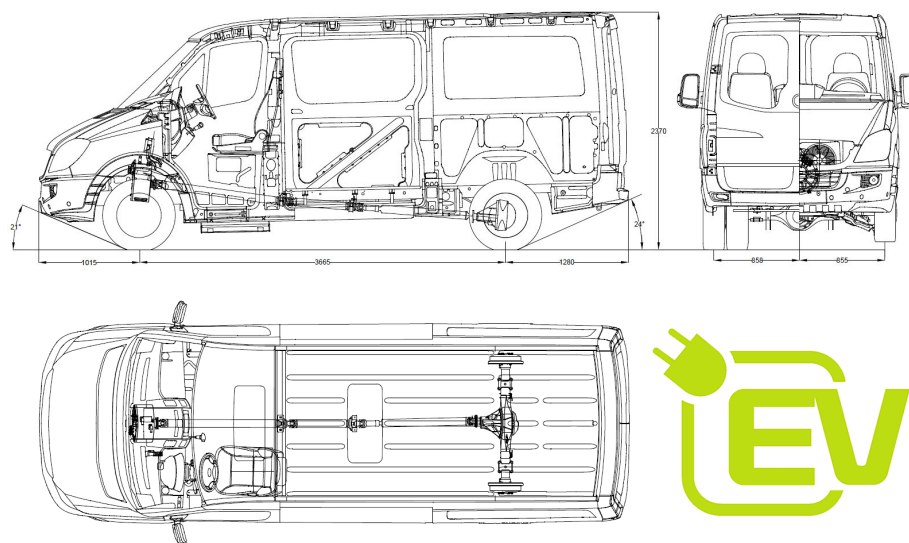

NOTE: All specifications are with normal manufacturing allowances and tolerances. Envirotech Drive Systems Incorporated. reserves the right to alter specifications at any time without prior notice.

Copyright © 2019 Envirotech Drive Systems Incorporated. All rights reserved. - [www.envirotechvehicles.com](http://www.envirotechvehicles.com)



## 2019 Electric Cutaway Logistics Van

<b>Dimensions</b>	Wheelbase (in/mm)	144.3 / 3,665
	Overall Length (in/mm)	234.6 / 5,960
	Overall Width Including Mirrors (in/mm)	79.53 / 2,020
	Overall Height (in/mm)	93.3 / 2,370
	Curb Weight (lb/kg)	5622 / 2,550
<b>Mechanical</b>	Gross Vehicle Weight Rating (lb/kg)	[11,133 / 5,050] or [14,110 / 6400]
	Drive	RWD
	Single Motor	Synchronous Permanent Magnet
	Motor Cooling	Liquid Cooling
	Capacity / Battery Chemistry	90.8 or 106.2 kWh / NMC Li-ion
<b>Performance</b>	On-Board Charger	6.6kW (Overnight Charging)
	Charger Type	J1772 CCS Level 2
	Total Peak Power (hp/kW)	181 / 135
	Total Peak Torque (lb-ft/Nm)	575 / 780Nm
	Top Speed (mph/km/h) Max.	62 / 100
<b>Body &amp; Chassis</b>	Gradeability [%]	≥20%
	Turning Radius (ft/m)	23 / 7
	Typical Duty Cycle	Parcel Delivery Van Class 3/4
	Body Construction	Unibody
	Front Suspension	Independent / Disk Brakes
	Rear Suspension	Leaf Spring / Drum Brakes
	Hydraulic Brake System	ABS / EBD
	Michelin Agilis® CrossClimate®*	225 / 75R16LT

\*low-rolling resistance tires maximize vehicle range



**Zero Emissions, 100% Electric**  
**Zero Noise Pollution**



NOTE: All specifications are with normal manufacturing allowances and tolerances. Envirotech Drive Systems Incorporated. reserves the right to alter specifications at any time without prior notice.

Copyright © 2019 Envirotech Drive Systems Incorporated. All rights reserved. - [www.envirotechvehicles.com](http://www.envirotechvehicles.com)